




79.95 EUR  
incl. 19% VAT, plus [shipping](#)

- FSB1333 !
- DVI !
- Dualchannel VGA

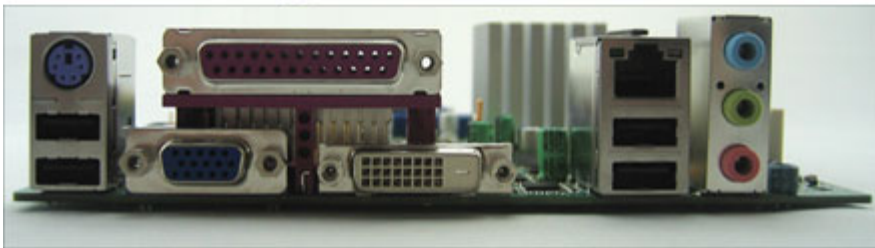

Support: [Review \[DE\]](#) | [Review \[EN\]](#)

Remnant with I/O shield. 2 years warranty.

The Intel® Desktop Board DG41MJ may be small but it offers legacy to premium features such as parallel port, integrated VGA and DVI ports, Intel® HD Video experience<sup>1</sup>, Intel® High Definition Audio and integrated 10/100/1000 network connection to enrich users' multimedia creation experience.

This mini-ITX form factor board supports Intel® Core™2 Quad processors and Intel® Core™2 Duo processors up to 65W Thermal Design Power (TDP) and 1333 Front Side Bus (FSB).

The Intel® Desktop Board DG41MJ is Microsoft Windows Vista\* Premium WHQL certified.

|             |                    |
|-------------|--------------------|
| Name        | DG41MJ             |
| Form Factor | Mini-ITX Mainboard |

|                       |   |
|-----------------------|---|
| CPU                   | Intel Core 2 Duo , upto 1333FSB (Socket 775)  |
| Chipset               | Intel G41 Express   |
| Graphics              | Intel GMA X4500   |
| Memory                | 2x DDR2 667/800 RAM (8GB max)   |
| Power                 | 24 Pin ATX, P4-connector  |
| Connectors (rear)     | <ul style="list-style-type: none"> <li>- 1x PS/2</li> <li>- 1x VGA (DSUB-15)</li> <li>- 1x DVI</li> <li>- 4x USB 2.0</li> <li>- 1x LPT</li> <li>- Audio</li> <li>- 1x LAN 10/100/1000 MBit</li> </ul> |
| SATA                  | 3x SATA-II (RAID)   |
| Audio                 | 6-channels (5.1) Realtek-Audio-Codec ALC888VC   |
| Connectors (internal) | <ul style="list-style-type: none"> <li>- PCI 1x</li> <li>- Audio</li> <li>- 4x USB 2.0</li> <li>- 3x SATA</li> <li>- 1x Serial</li> </ul>   |
| Included              | <ul style="list-style-type: none"> <li>- DG41MJ Mainboard</li> <li>- I/O ATX rear plate</li> <li>- 2x SATA cable</li> <li>- Quickstart-Guide</li> <li>- Drivers CD</li> </ul>                         |

**Note :** The Original CPU heatsink which comes with Boxed CPUs is too heigh for almost all ITX enclosures. Thats why it does not fit into every enclosure.

With [LowProfile heatsink/fan](#) compatible with :

- M300(-LCD)
- Morex enclosures 2699/3677/3777/3688

For Operating you need a P4 adapter or a PSU with P4 connector