




999.00 EUR  
incl. 19% VAT, plus [shipping](#)

- 2x Gigabit LAN !
- 6x COM port !
- 12VDC Input !
- Mini-PCI Express !

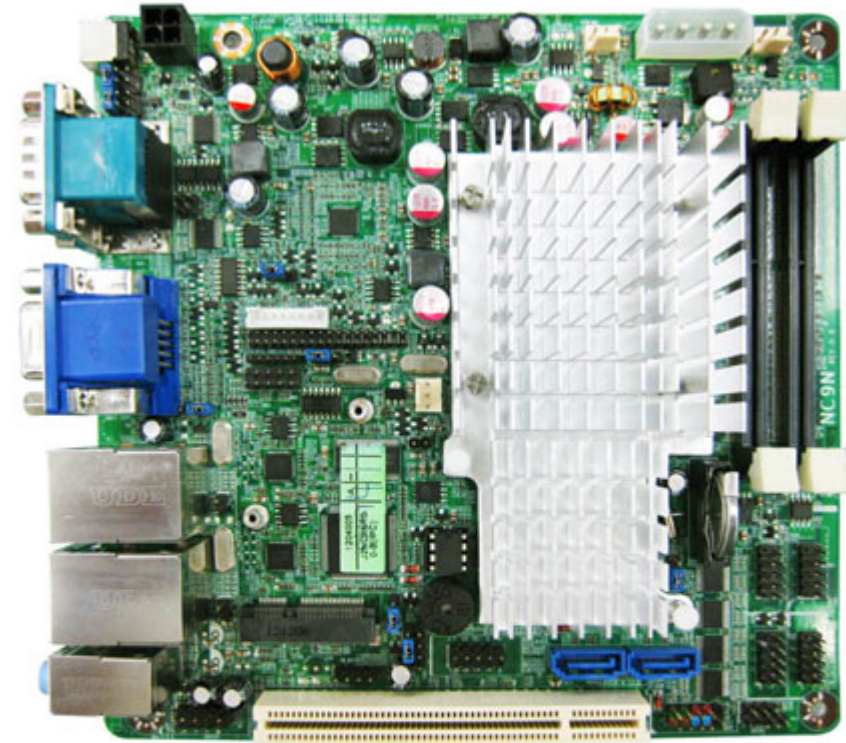

- INTEL® Cedar Trail-D Processor D2550 + NM10 Chipset
- Support 2 \* DDR3 800/1067MHz Single CH up to 4GB
- Support DirectX 9 Graphics
- Support 2 \* Serial ATAII (3Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 1 \* 24 bits Single Channel LVDS header
- Supports 2 \* Realtek RT8111EVL Gigabit LAN
- Support 6 \* COM ports (COM2 for RS232/422/485)
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

|                        |                                                    |
|------------------------|----------------------------------------------------|
| <b>CPU</b>             | INTEL® Cedar Trail-D Processor D2550 CPU (1.86GHz) |
| <b>Chipset</b>         | INTEL®NM10 Express chipset                         |
| <b>Memory</b>          | 2 * DDR3 1067MHz Single CH SO-DIMM up to 4GB       |
| <b>Expansion Slots</b> | 1 * PCI slot<br>1 * Mini PCI-E socket              |
| <b>Storage</b>         | 2 * Serial ATA2 3Gb/s connectors                   |
| <b>Audio</b>           | Realtek ALC662 6-Channel HD Audio                  |
| <b>Ethernet LAN</b>    | 2 * RTL8111EVL PCI-E Gigabit LAN                   |
| <b>LVDS</b>            | Onboard 24-bits single channel connector           |
| <b>USB</b>             | Embedded 7 * USB 2.0/1.1                           |

|                           |                                                                                                                                                                                                                                                                                                        |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>Special Features</b> | <ul style="list-style-type: none"> <li>• Support ACPI S3</li> <li>• Support CPU Smart FAN</li> <li>• Support Watch Dog</li> </ul>                                                                                                                                                                      |
| • <b>Rear Panel I/O</b>   | <ul style="list-style-type: none"> <li>• 4 * USB 2.0/1.1 ports</li> <li>• 2 * RJ-45 port</li> <li>• 3 * Audio I/O ports ( Line-in, MIC and Line-out )</li> <li>• 1 * VGA port</li> <li>• 1 * HDMI port</li> <li>• 2 * COM ports (COM2 for RS232/422/485)</li> <li>• 1 * +12V DC-in jack</li> </ul>     |
| • <b>Internal I/O</b>     | <ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports</li> <li>• 1 * PS/2 Mouse &amp; 1 * Keyboard header</li> <li>• 2 * NB / Chassis Fan connectors;</li> <li>• 1 * LVDS header/1 * Inverter header</li> <li>• 1 * AUDIO header</li> <li>• 4* RS232 headers</li> </ul> |
| • <b>BIOS</b>             | • AMI 16MB UEFI DIP Flash ROM                                                                                                                                                                                                                                                                          |
| • <b>Functional</b>       | • ATM, Automation, Medical Equipment, Kiosk, Networking, POS, General Application, Transportation                                                                                                                                                                                                      |
| • <b>Packing</b>          | • Color Box Dimension ■ 200(W) x 200(D) x 70(H)mm                                                                                                                                                                                                                                                      |
| • <b>Certificate</b>      | • CE, FCC, RoHS                                                                                                                                                                                                                                                                                        |
| • <b>Temperature</b>      | <ul style="list-style-type: none"> <li>• Operating within 0~40 centigrade (<b>Suggest to use system FAN</b>)</li> <li>• Storage within -20-85 centigrade</li> </ul>                                                                                                                                    |
| • <b>Form Factor</b>      | • Mini ITX Form Factor(17cmx17cm)                                                                                                                                                                                                                                                                      |

**Product Accessories**

- 4x COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield