


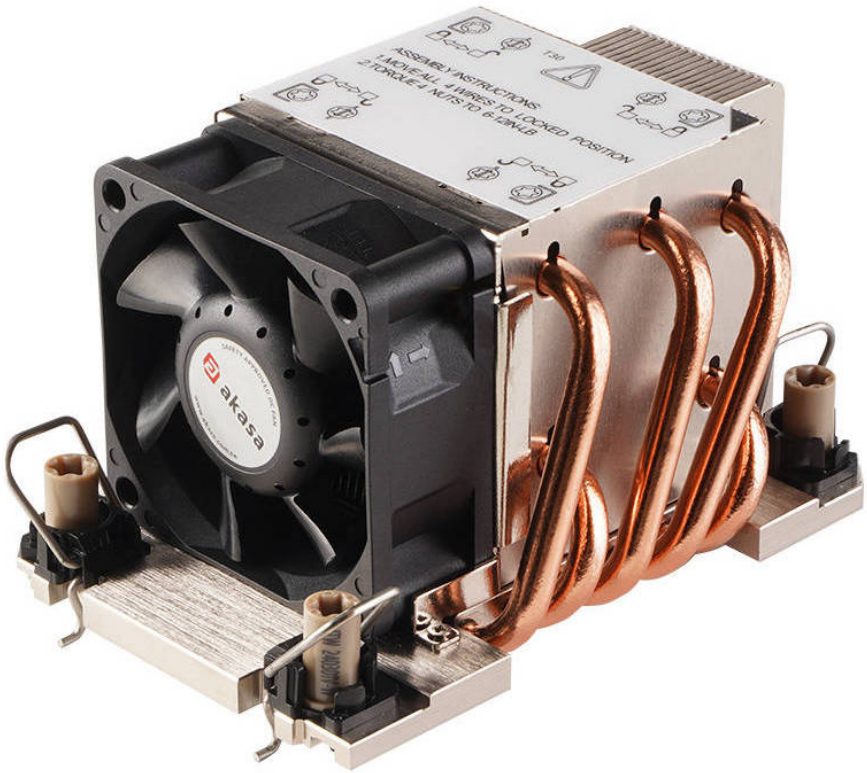


59.95 EUR
incl. 19% VAT, plus shipping

- 2U Server Cooler !
- 320W TDP Support !
- LGA4677 / 4710 !
- AK-CC9503BP01 !

High-performance 2U server cooler for Intel Xeon CPUs with LGA4677 or LGA4710 socket. The cooler supports up to 320W TDP and combines aluminium fins, five copper heatpipes and a 60mm PWM fan for reliable cooling in demanding server environments.

**Features :**

- Active 2U cooler for Intel Xeon CPUs with LGA4677 / LGA4710 socket
- Aluminium fins with five copper heatpipes
- 320W TDP cooling capacity
- 60 x 25 mm PWM fan with two ball bearings
- E1B CPU carrier for LGA4677 and mounting screws included

- LGA4677 CPUs with E1A / E1C carrier and LGA4710 CPUs with E2A / E2B carrier require a separate plastic CPU carrier frame

| | |
|---|---|
| Socket Type | LGA4677, LGA4710 |
| Solution | 2U Server |
| Suggestion TDP (W) | 320 |
| Cooler Dimensions | 118 x 80 x 66.5 mm |
| Material | Aluminium fin with five copper heatpipes |
| Installation | Mounting screw (include E1B CPU carrier) |
| Weight | 430g |
| Thermal Interface | Pre-apply |
| Product Code | AK-CC9503BP01 |
| Dimensions | 60 x 60 x 25mm (Cable Length: 200mm) |
| Bearing | Two ball bearing |
| Fan Speed | 2600-8000 RPM |
| Max Airflow | 47.2 CFM |
| Max Air Pressure | 22.0 mm-H2O |
| Noise Level | 52.5 dB(A) (Max) |
| Fan Rated Current | 0.82A (Max:0.85A) |
| Fan Rated Voltage | DC 12V |
| Connector | 4-Pin PWM (2510 connector) |
| Fan Life Expectancy | 80,000 hours |
| Warranty | 2 years |