




349.00 EUR  
incl. 19% VAT, plus [shipping](#)

(c) CarTFT.com

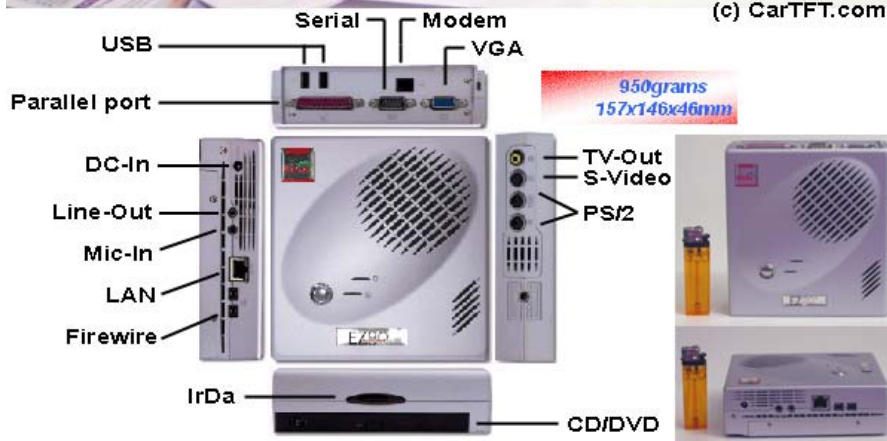

E3032S - Intel Pentium III / Celeron Barebone

There is no smaller PC ! (157x146x46 mm)

Full-featured miniPC barebone. You only need these further components :

- CPU Intel Pentium III / Celeron / VIA C3 (Socket 370, FSB 66/100/133)
- Memory (1x 144pin SDRAM SO-DIMM upto 256 MB RAM)
- Harddisk (2.5")

A slimline DVD-drive is already included with the barebone !

## Features

|          |                                                                                                      |
|----------|------------------------------------------------------------------------------------------------------|
| CPU      | Socket 370 (Pentium III / Celeron / VIA C3) - 0.18micron & 0.13micron<br>FCPGA<br>FSB 66/100/133 Mhz |
| Memory   | 1x 144pin SDRAM SO-DIMM / PC-100 / 64, 128 oder 256 MB                                               |
| Harddisk | 1x 2.5"                                                                                              |
| CD/DVD   | 1x 5.25" Slimline drive                                                                              |

## Spezifications

|            |                                                                                                         |
|------------|---------------------------------------------------------------------------------------------------------|
|            | - 16bit Stereo SoundBlaster compatible soundsystem (Full Duplex 3D Stereo Sound)                        |
| Audio      | - Built-In speakers<br>- 3.5mm Klinke microphone-input<br>- 3.5mm Klinke Line-out for external speakers |
| Flash BIOS | Flash EPROM Bios allows later upgrades                                                                  |

---

|                        |                                                    |
|------------------------|----------------------------------------------------|
| Video                  | - Built-In Video Accelerator (Intel 82810E)        |
|                        | - Hardware MPEG2-DVD Accelerator (Intel 82810E)    |
|                        | - 11.2MB graphics adapter memory (shared Memory)   |
|                        | - VGA resolution upto 1280x1024 (24bit)            |
|                        | - 15-pin mini D-sub VGA Input                      |
|                        | - S-Video Output                                   |
|                        | - AV Cinch Video Output                            |
|                        | - 2x Firewire (1394)                               |
| I/O                    | - 2x USB                                           |
|                        | - 1x 9-pin Serial (RS-232)                         |
|                        | - 1x 25-pin Parallel (EPP/ECP)                     |
|                        | - 1x 6-pin PS/2 Mouse                              |
|                        | - 1x 6-pin PS/2 Keyboard                           |
| Communications         | - Built-In 56K V.90 Modem (RJ-11 Input)            |
|                        | - Built-In 10/100Base-T Ethernet LAN (RJ-45 Input) |
|                        | - Built-In Infrared-Receiver (IRDA[SIR])           |
| Chipset                | Intel 810e                                         |
| Weight                 | 0.95kg (2.09lbs)                                   |
| Dimensions             | 15.7 x 14.6 x 4.6cm (6.18 x 5.75 x 1.81 inches)    |
| Power                  | - Power in : DC 18 V / 3.2A (Max. power 57 Watts)  |
| <b>Scope of supply</b> | - Silver barebone with built-in DVD-drive          |
|                        | - Installation tutorial with many pictures         |
|                        | - External 230V power supply                       |
|                        | - Manual                                           |
|                        | - Modem connection cable                           |
|                        | - Heat sink pound for CPU-Installation             |
|                        | - Some screws                                      |